


Client: Newham Council

Project Description: Renewal of Rising busbar, new lateral mains, replacement of landlord lighting with 24V Commulite system, estate lighting. 15 story residential block with 60 flats Seymour Road E13.

Project Duration: 8 months

Project Value: £238,950

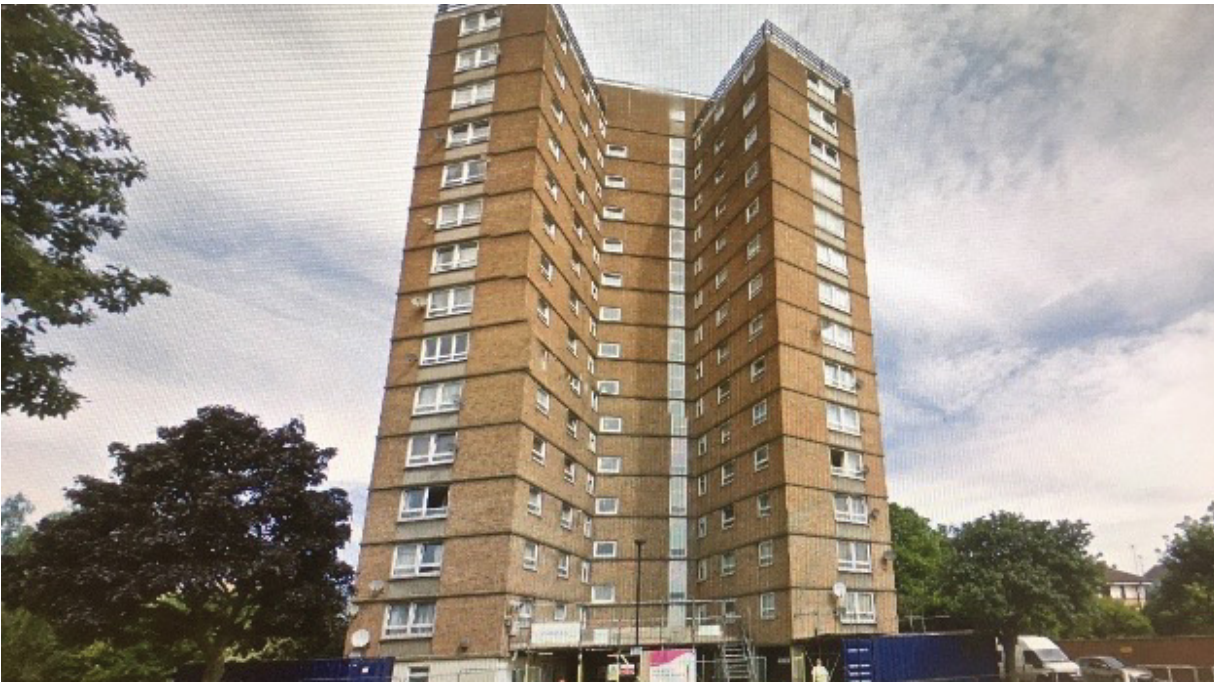

Background: Newham Council Communal and External refurbishment.

Brief Description of Works: Installation of Ryfield rising busbar system, renewal of lateral mains. Installation of 2 compartment trunking for Entryphone, T.V. and BT services, New 24V Commulite Emergency lighting system. Liaising with UKPN for replacement of service heads and EDF for changeovers.

Challenge: Maintaining existing mains supplies whilst installing new. Maintaining existing 230V lighting whilst installing 24V Commulite emergency lighting system. Liaising with UKPN and EDF to get head change and lateral mains changeover done in same day.

Technical Solution: Installed a totally separate mains system whilst maintaining ageing existing system. Renewed lighting in stages so block was never without lights.

Added Value: Supplied trunking in white to avoid extra cost of decorating. Devised method of installing new riser which saved the client the cost of constructing new riser cupboard. Supplied all site temporary supplies free of charge.

Case Study

